

REVISION RECORD				
REV	ECN	DESCRIPTION	DRFT	DATE
A0		NEW		21.08.16





NOTES1:  
 UL Standard  
 1.Rated voltage/current : 300V / 20A  
 3.Torque value : M2.5 , 3.5Lb.in  
 4.Wire range : 30~12AWG

IEC Standard  
 1.Rated voltage/current : 450V / 24A  
 2.Torque value : M2.5 , 0.4N·m  
 3.Wire range : 0.5~2.5mm<sup>2</sup>

NOTES2:  
 1.Dimension shall be interpreted per ASME Y14.5-2009  
 2.Pitch : 7.50mm, Poles : N=02~16P  
 3.Stripping length : 12~13mm  
 4.Withstanding voltage : AC2500V/1Min  
 5.Operating temperature: -40°C~+105°C  
 6.Undimensioned tolerances:

Pitch range in mm		Nominal dimension range in mm							
TO	Over	Over	Over	Over	Over	0.1/10			
6	TO 10	TO 24	TO 30	TO 60	TO 100	TO 150			
±0.15	±0.20	±0.30	±0.30	±0.50	±0.70	±1.00	±1.30	±2'	

7.RoHS Compliance

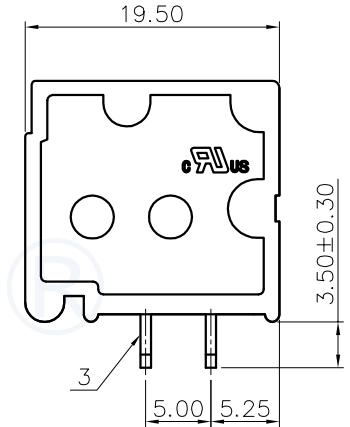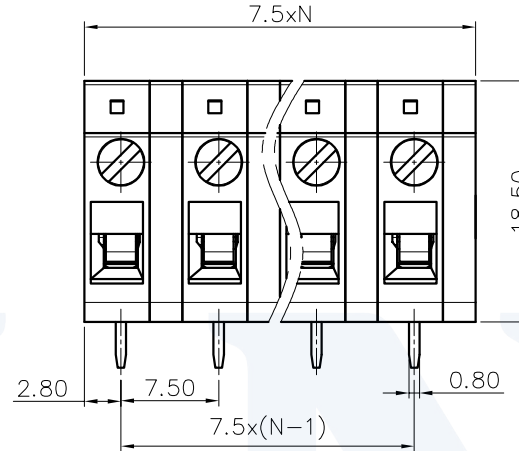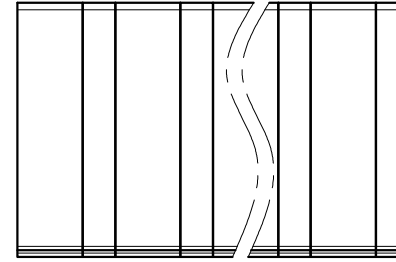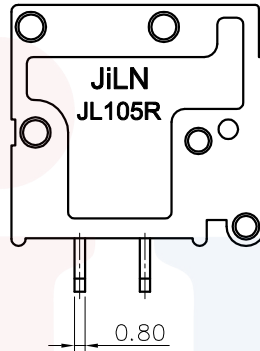

## Ordering Information

**JL105R- 750 XX G 0 1**

Pitch  
750=7.5PH


No.of pins  
2P~24P

Housing  
 B=Black  
 G=Green  
 U=Blue  
 R=Red  
 W=White  
 Y=Yellow  
 □=Orange  
 E=Grey

Color

Packing  
 0=Pe bag  
 T=Tube  
 A=Tray

Color

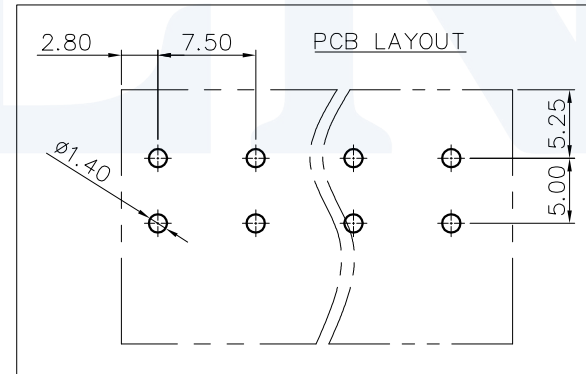

DRAW	SHUANGPING ZHENG	SCALE	FIT	<b>JiLN</b> ® 东莞市锦凌电子有限公司 DONGGUAN JINLING ELECTRONIC CO.,LTD	
CHECK	LICHAD LIU	UNIT	mm		
APPROVE	YONGLIANG GAO	SIZE	A4	PART NO.	JL105R-750XXG01
		SHEET	1/1	TITLE:	JL105R-7.5-XXP 螺钉式/弯脚/绿色
		PROJ.			