




SPECIFICATIONS

Rated Current: 3.0AMP
 Contact Resistance: 30mΩ Max
 Withstand Voltage: 1000V AC/DC
 Insulation Resistance: 1000MΩ Min
 Operation Temperature: -40°C to +105°C

Contact Material: Brass
 Contact Plating: Au or Sn Over Ni
 Insulator Material: Polyester (UL94V-0)
 Resistance To Soldering Heat:
 245°C±5°C, 10s (PBT insulator)

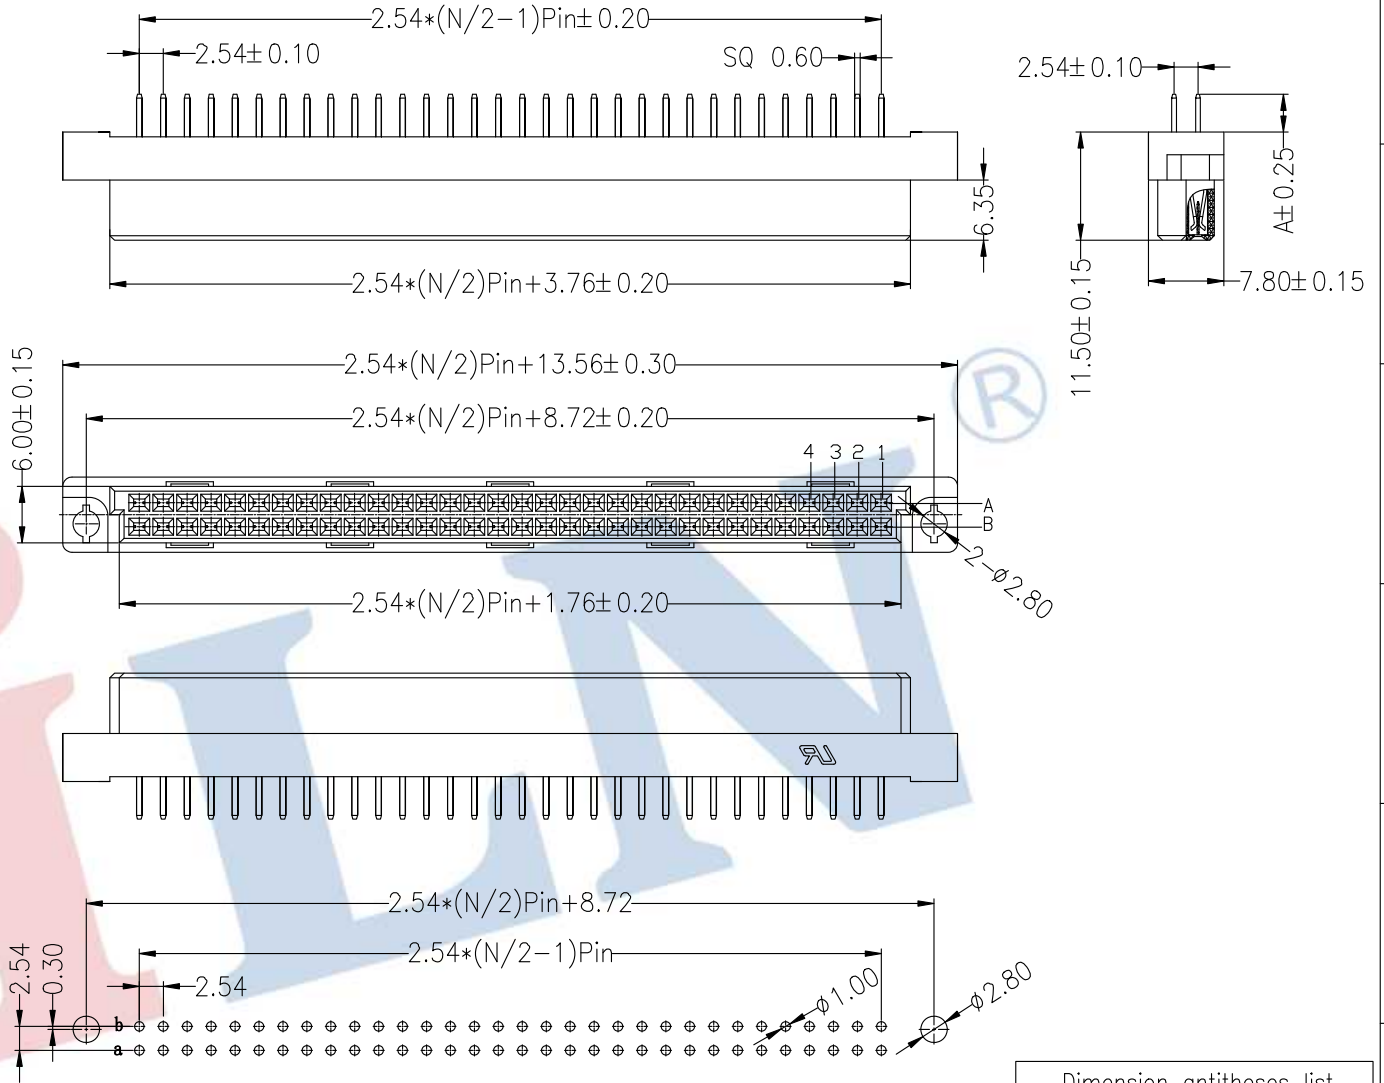

Ordering Information

35112 XX B F S XX BNAX

No. of Pins NPin N=10, 16, 20, 32, 44, 48, 64	Contact Type F=Female	Contact Plating G0: Gold Flash S0: Gold Flash/Tin S1: 3U" Gold/Tin S2: 5U" Gold/Tin S3: 10U" Gold/Tin S4: 15U" Gold/Tin	Stream Code
--	--------------------------	---	-------------

Recommended P.C.B Layout (Top Side)
 (PCB BOARD TOLERANCE ±0.05)

Dimension antitheses list	
ITEM	A
Standard	4.00

				OPERATION	DRAW	Jelly Feng	22.10.14	SCALE	FIT	JILN® 深圳市锦凌电子有限公司 SHENZHEN JINLING ELECTRONICS CO.,LTD Tel: 86-755-27483253 Fax: 86-755-2997-5588
				X.X ±0.30				UNIT	mm	
B	2014.09.16	增加UL标识		X.XX ±0.20	CHECK			SIZE	A4	
A0	2012.04.10	NEW DRAWING		X.XXX ±0.10				SHEET	1/1	
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	Angle ±3° DIM TOL	APPROVE			PROJ.		
								PART NO.	35112XXBFSXXBNAX	
								TITLE:	欧式插座 母座 180度 2xNPIN 成品系列图	