

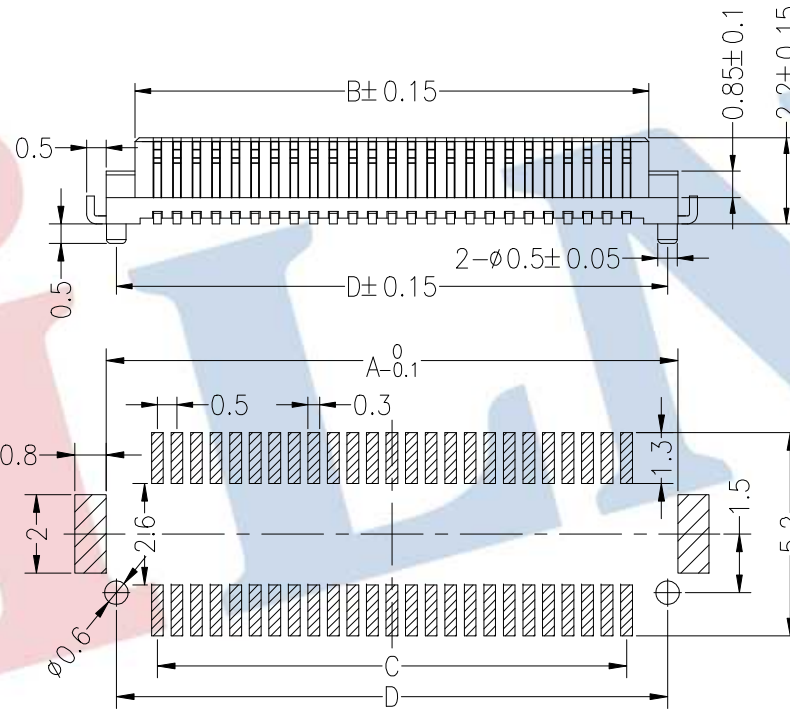


HSF RoHS

SPECIFICATIONS PERFORMANCE

Electical Rating: AC/DC 50V 0.5A
 Insulation Resistance: 500MΩ
 Withstang Volt: 200V AC/minute
 Opratng Temperature: -40°C to +105°C
 Material
 Contact: Phosphor Bronze Gold-Plated
 Housing: LCP/PA46
 Max.Processing Temp: 260°C±5°C 5S

Dimension Table				
No Of Pins	Dim A	Dim B	Dim C	Dim D
20	7.12	5.64	4.50	6.60
30	9.62	8.14	7.00	9.10
32	10.12	8.64	7.50	9.60
36	11.12	9.64	8.50	10.60
40	12.12	10.64	9.50	11.60
50	14.62	13.14	12.00	14.10
60	17.12	15.64	14.50	16.60
80	22.12	20.64	19.50	21.60
100	27.12	25.64	24.50	26.60

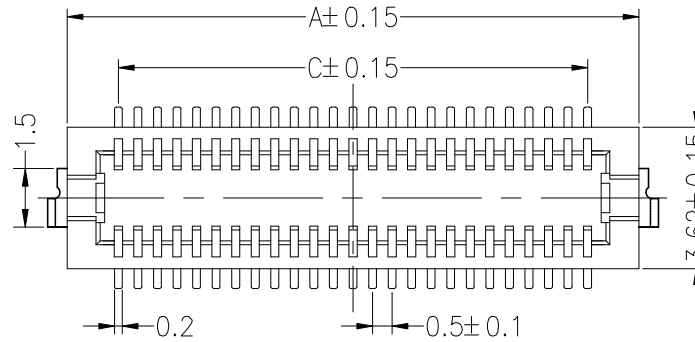

Ordering Information

3720 M XXX 022 XX X X 0X

F=Female
 M=Male
 No.of pins
 20~100P
 Plastic Height
 022=2.2mm
 Contact Plating
 G0:Gold Flash
 G1:3U" Gold
 G2:5U" Gold
 G3:10U" Gold
 G4:15U" Gold
 G5:30U" Gold
 S0:Gold Flash/Tin
 Insulator Material Option
 D=PA46
 F=LCP
 Packing
 T:Tube
 R:Reel

Recommended P.C.B Layout(Top Side)
 (PCB BOARD TOLERANCE±0.05)

OPERATION		DRAW	Jelly Feng	2022.10.22	SCALE	FIT
X.X	±0.30					
X.XX	±0.20	CHECK			UNIT	mm
X.XXX	±0.10					
Angle	±3°	APPROVE			SHEET	1/1
DIM	TOL					

JILN® 深圳市锦凌电子有限公司
 SHENZHEN JINLING ELECTRONICS CO.,LTD
 Tel: 86-755-27483253 Fax: 86-755-2997-5588

REV	DATE	MODIFICATION DESCRIPTION	CHANGE
A1	2022.9.6	修订PCB封装参考尺寸	ChenWei
A0	2019.11.15	NEW DRAWING	ChenWei

PART NO.	3720MXXX022XXXX0X
TITLE:	0.5BTB-NPIN H=2.2公座带柱带定位片