
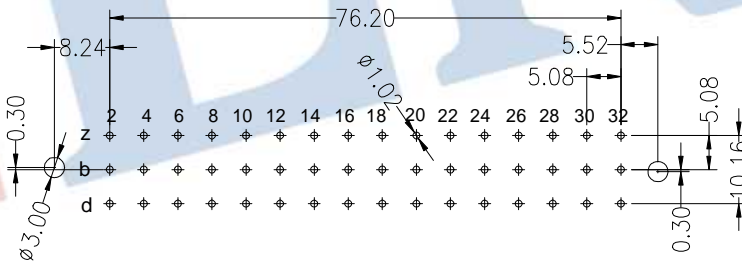
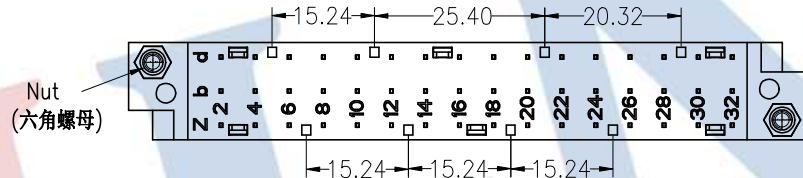

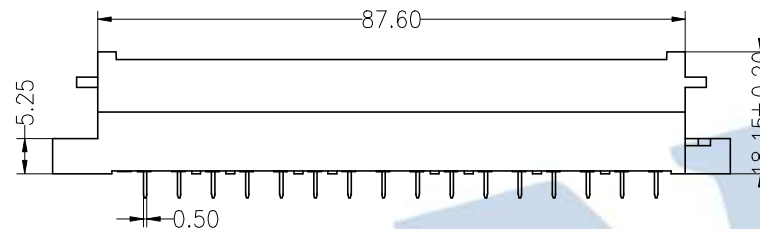


HSF RoHS

SPECIFICATIONS

Current rating: 5.6AMP.
 Contact resistance: 15mΩ max. at 100mA DC
 Insulation resistance: 1000MΩ min. at 500V DC
 Dielectric withstanding voltage: 1500V AC For 1minute
 Operating temperature: -55°C TO +125°C

Contact Material:Copper Alloy
 Contact Plating:Au or Sn Over Ni
 Insulator Material:Polyester(UL94V-0)
 Standard: PBT
 Max.Processing Temp: 245°C±5°C For 5 Second

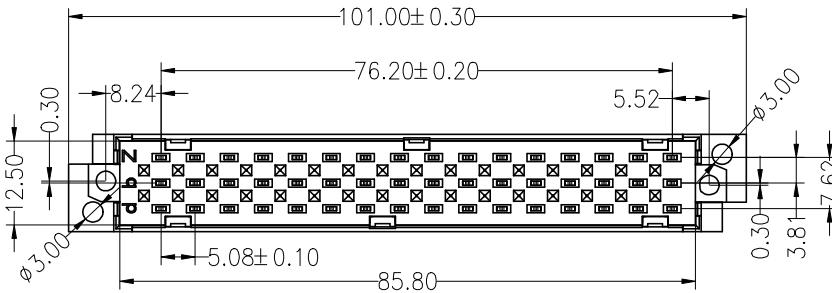

Recommended P.C.B Layout(Top Side)
 (PCB BOARD TOLERANCE±0.05)

Ordering Information

35133 48 A M S XX B N A X

No.of Pins: 48PIN
 Contact Type: M=male
 Contact Plating:
 G0:Gold Flash
 S0:Gold Flash/Tin
 S1:3U" Gold/Tin
 S2:5U" Gold/Tin
 S3:10U" Gold/Tin
 S4:15U" Gold/Tin
 S5:30U" Gold/Tin
 SN:Tin
 Stream Code

| | | | | | | | | | | | | |
|---|-----|------------|--------------------------|-----------|-------------|---------|------------|------------|-------|-----|---|---|
| A | AO | 2023.03.29 | NEW DRAWING | CHANGE | OPERATION | DRAW | Jelly Feng | 2023.03.29 | SCALE | FIT | JILN ® 深圳市锦凌电子有限公司 SHENZHEN JINLING ELECTRONICS CO.,LTD Tel: 86-755-27483253 Fax: 86-755-2997-5588 | |
| | REV | DATE | MODIFICATION DESCRIPTION | | X.X ±0.30 | CHECK | | | UNIT | mm | | |
| | | | | | X.XX ±0.20 | | | | SIZE | A4 | PART NO. | 351348AMSXXBNAX |
| | | | | | X.XXX ±0.10 | APPROVE | | | SHEET | 1/1 | TITLE: | DIN 41612 of 5.08mm pitch large current 180° Male 348 |
| | | | | Angle ±3° | | | | PROJ. | ⌀ | | | |
| | | | | DIM TOL | | | | | | | | |