
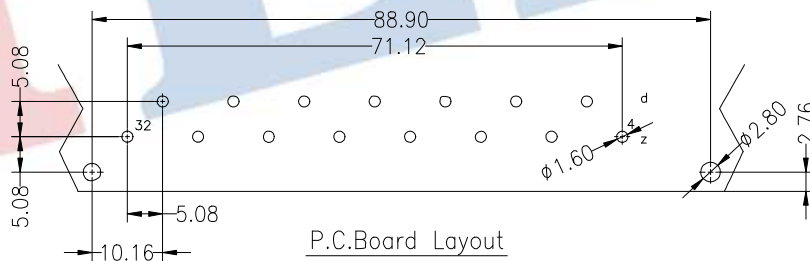
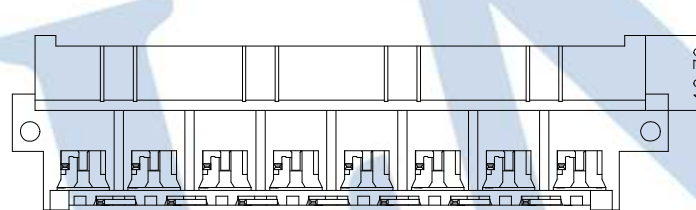

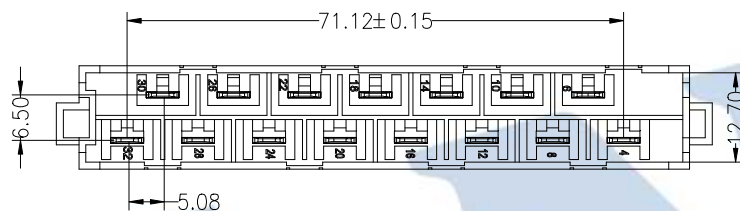


HSF RoHS

SPECIFICATIONS

Current rating: 15Amp.
 Contact resistance: 20mΩ
 Insulation resistance: 1000MΩ min. at 500V DC
 Dielectric withstanding voltage: 3100V AC for 1 minute
 Operating temperature: -55°C to +125°C

Contact Material: Copper Alloy
 Contact Plating: Au or Sn Over Ni
 Insulator Material: Polyester(UL94V-0)
 Standard: PBT
 Max.Processing Temp: 245°C±5°C for 5 second

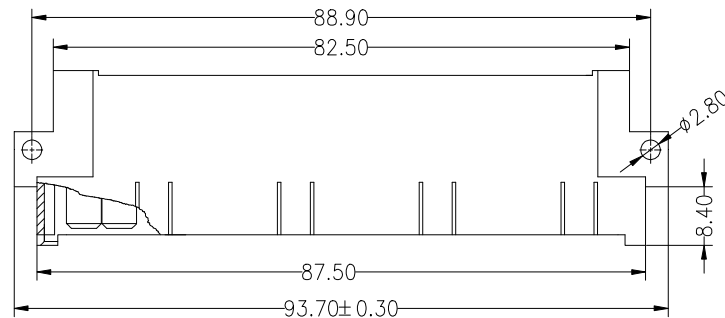

Ordering Information

3512 2 15 B M R XX B N 0X

No. of Pins: 15PIN
 Contact Type: M=Male
 Contact Plating: S0:Gold Flash/Tin, SN:Tin

				OPERATION		DRAW	Jelly Feng	2023.03.30	SCALE	FIT	JILN ® 深圳市锦凌电子有限公司 SHENZHEN JINLING ELECTRONICS CO.,LTD Tel: 86-755-27483253 Fax: 86-755-2997-5588	
				X.X	±0.30				UNIT	mm		
				X.XX	±0.20	CHECK			SIZE	A4	PART NO. 3512215BMRXBNOX	
				X.XXX	±0.10				SHEET	1/1		
A0	2023.03.30	NEW DRAWING		Angle	±3°	APPROVE			PROJ.	☉	TITLE:	DIN 41612 H15 Type Female
REV	DATE	MODIFICATION DESCRIPTION		DIM	TOL							