





SPECIFICATIONS

Rated Current:3.0AMP
 Contact Resistance:30mΩ Max
 Withstand Voltage:1000V AC/DC
 Insulation Resistance:1000MΩ Min
 Operation Temperature:-40°c to +105°c

Contact Material:Copper Alloy
 Contact Plating:Au or Sn Over Ni
 Insulator Material:Polyester(UL94V-0)
 Resistance To Soldering Heat:
 245℃±5℃ For 5 Second(PBT insulator)

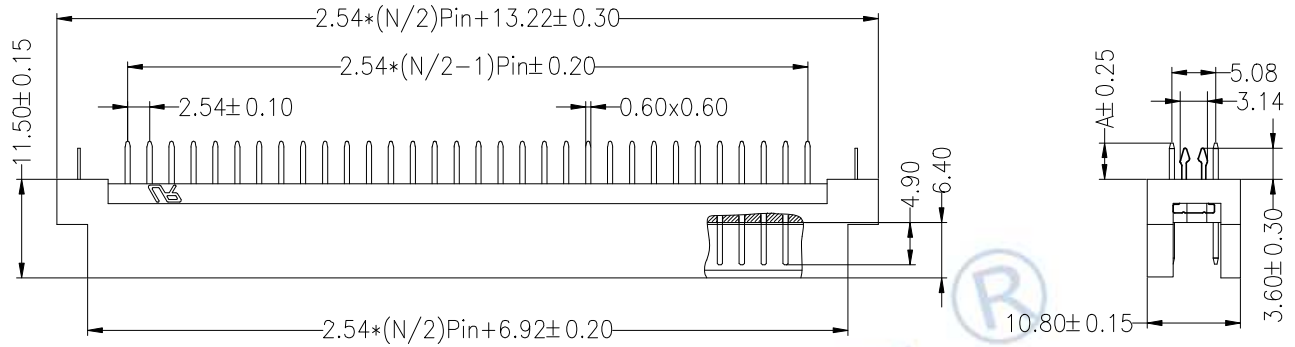


注: b排全缺

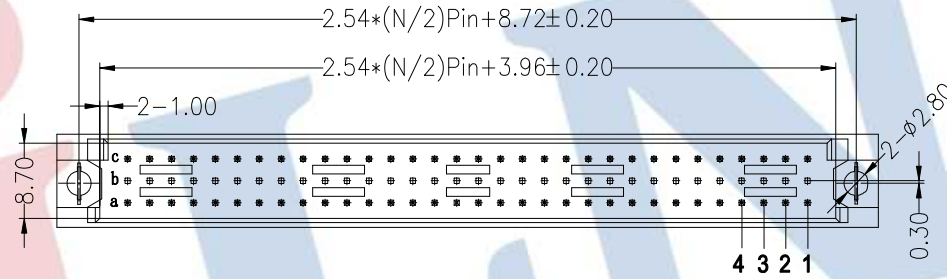

Ordering Information

35113 XX C M S XX B W A X

No.of Pins NPin N=20、32、 64	Contact Type M=Male	Contact Plating G0:Gold Flash S0:Gold Flash/Tin S1:3U" Gold/Tin S2:5U" Gold/Tin S3:10U" Gold/Tin S4:15U" Gold/Tin S5:30U" Gold/Tin	Contact Material B=Brass	Stream Code
--------------------------------------	------------------------	---	-----------------------------	-------------

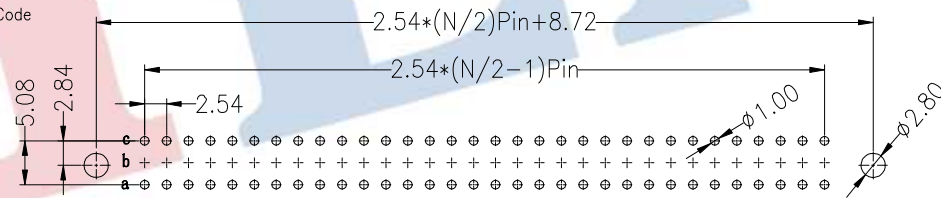

Recommended P.C.B Layout(Top Side)
 (PCB BOARD TOLERANCE±0.05)

Dimension antitheses list	
ITEM	A
Standard	4.00

A	AO	2023.03.29	NEW DRAWING	CHANGE	OPERATION	DRAW	Jelly Feng	2023.03.29	SCALE	FIT	JILN ® 深圳市锦凌电子有限公司 SHENZHEN JINLING ELECTRONICS CO.,LTD Tel: 86-755-27483253 Fax: 86-755-2997-5588	PART NO.	35113XXCMSXXBWAX	
	REV	DATE	MODIFICATION DESCRIPTION		X.X ±0.30	CHECK			UNIT	mm			TITLE:	欧式插座 公座 180度 3xNPin 带鱼叉缺b排 成品系列图
					X.XX ±0.20	APPROVE			SIZE	A4				
					X.XXX ±0.10				SHEET	1/1				
					Angle ±3°			PROJ.	☉					
					DIM TOL									