

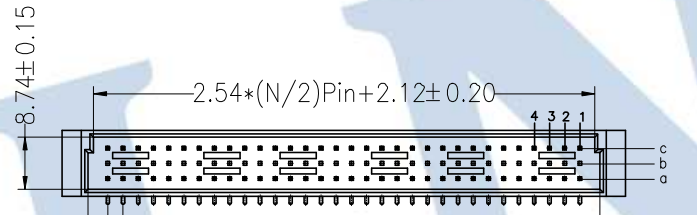



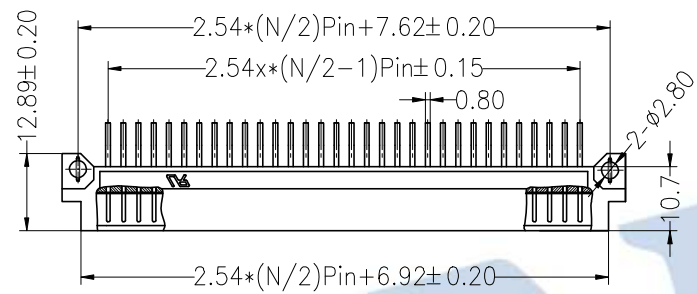


**SPECIFICATIONS**

Rated Current:3.0AMP  
 Contact Resistance:30mΩ Max  
 Withstand Voltage:1000V AC/DC  
 Insulation Resistance:1000MΩ Min  
 Operation Temperature:-40°c to +105°c

Contact Material:Brass  
 Contact Plating:Au or Sn Over Ni  
 Insulator Material:Polyester(UL94V-0)  
 Resistance To Soldering Heat:  
 245° C±5° C For 5~10 Second(PBT insulator)

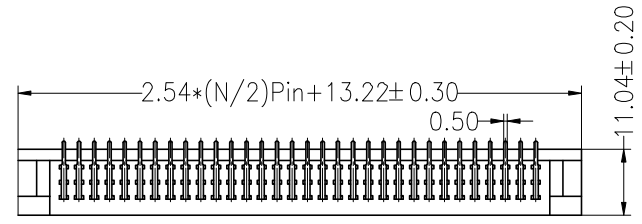

注: 缺b排

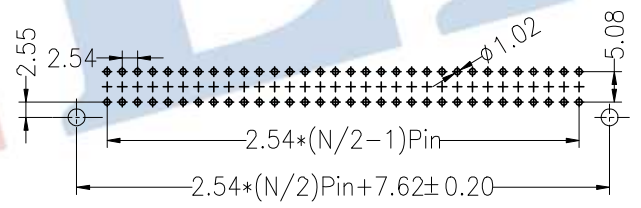

Recommended P.C.B Layout(Top Side)  
 (PCB BOARD TOLERANCE±0.05)

Dimension antitheses list	
ITEM	A
Standard	3.00

**Ordering Information**

**35113 XX C M R XX B N A X**

- No.of Pins  
NPin  
N=14、20、32、64
- Contact Type  
M=Male
- Contact Plating  
G0:Gold Flash  
S0:Gold Flash/Tin  
S1:30U" Gold/Tin  
S2:50U" Gold/Tin  
S3:10U" Gold/Tin  
S4:15U" Gold/Tin  
S5:30U" Gold/Tin
- Contact Material  
B=Brass
- Stream Code

A	AO	2023.03.29	NEW DRAWING	CHANGE	OPERATION	DRAW	Jelly Feng	2023.03.29	SCALE	FIT	<b>JILN</b> ® 深圳市锦凌电子有限公司 SHENZHEN JINLING ELECTRONICS CO.,LTD Tel: 86-755-27483253 Fax: 86-755-2997-5588	PART NO.	35113XXCMRXXBNAX
	REV	DATE	MODIFICATION DESCRIPTION	CHANGE	X.X	±0.30	CHECK		UNIT	mm			
					X.XX	±0.20			SIZE	A4			
					X.XXX	±0.10	APPROVE		SHEET	1/1			
					Angle	±3°			PROJ.	☉			
				DIM	TOL			TITLE:	欧式插座 公座 90度 无鱼叉 缺b排 成品系列图				