



HSF RoHS

**SPECIFICATIONS
PERFORMANCE**



Electical Rating: AC/DC 50V 0.5A
 Contact Resistance: 80mΩ Max
 Insulation Resistance: 500MΩ Min
 Withstand Volt: 500V AC/minute
 Opratng Temperature: -40°C to +105°C

Material



Contact: Phosphor Bronze Gold-Plated
 Locating plate: Phosphor Bronze
 Housing: LCP UL94V0
 Max.Processing Temp: 260°C±5°C 5S

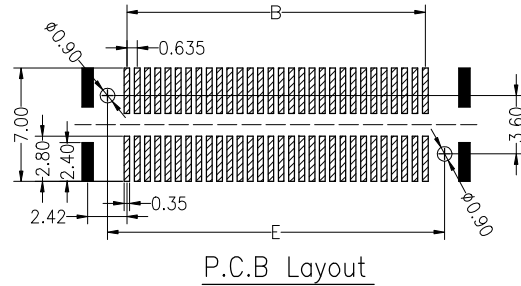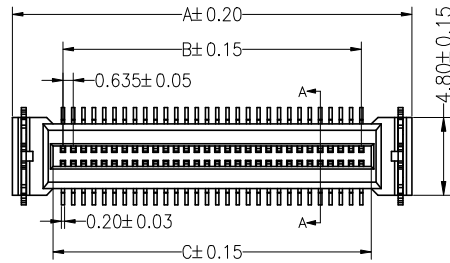

P.C.B Layout

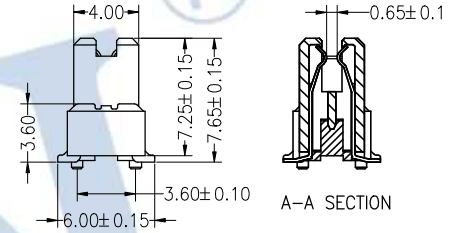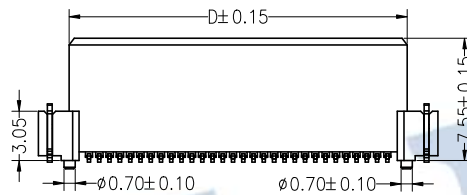

A-A SECTION

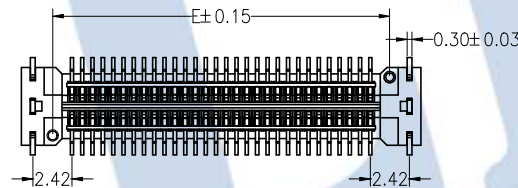

Mating Draw (Ref)

Ordering Information

3724 M XXX 076 XX X X 0X

F=Female
M=Male

No.of Pins
NPin
N=60

Plastic Hight
076=7.65mm

Contact Plating
G0:Gold Flash
G1:3U" Gold
G2:5U" Gold
G3:10U" Gold
G4:15U" Gold
S0:1.5U" Gold/Tin
S1:3U" Gold/Tin

Insulator Material Option
D=BK-PA46
E=BK-PA9T
F=BK-LCP

Packing
T:Tube
R:Reel

Dimension Table					
No Of Pins	Dim A	Dim B	Dim C	Dim D	Dim E
60	24.65	18.42	19.65	20.85	20.80

OPERATION		DRAW	Jelly Feng	2023.03.06	SCALE	FIT
X.X	±0.30					
X.XX	±0.20	CHECK			UNIT	mm
X.XXX	±0.10				SIZE	A4
Angle	±3°	APPROVE			SHEET	1/1
DIM	TOL				PROJ.	☉

JILN 深圳市锦凌电子有限公司
 SHENZHEN JINLING ELECTRONICS CO.,LTD
 Tel: 86-755-2997-5806/5802 Fax: 86-755-2997-5992

A0	2023.03.06	NEW DRAWING	CHANGE
REV	DATE	MODIFICATION DESCRIPTION	CHANGE
1	2	3	4

PART NO. 3724MXXX076XXXX0X
 TITLE: 0.635mm 浮动式 BTB NPin H7.65 Male