

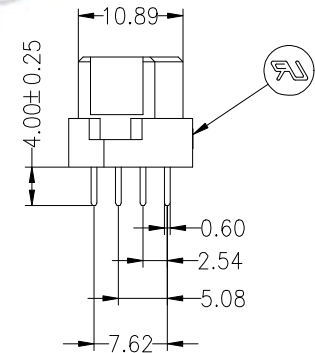


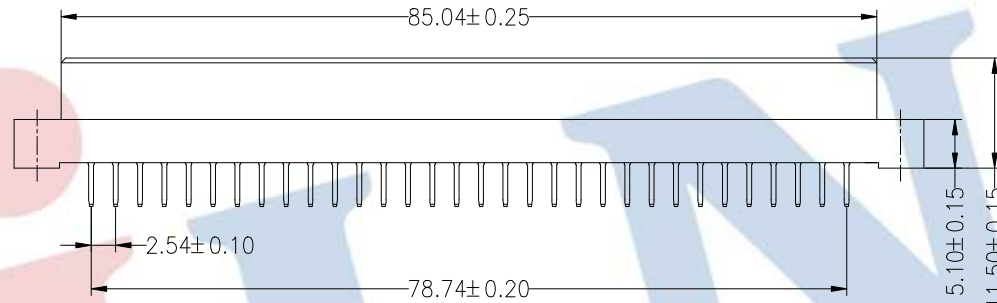

**SPECIFICATIONS**  
 Rated Current:3.0AMP  
 Contact Resistance:30mΩ Max  
 Withstand Voltage:1000V AC/DC  
 Insulation Resistance:1000MΩ Min  
 Operation Temperature:-40°C to +105°C


Contact Material:Copper Alloy  
 Contact Plating:Au or Sn Over Ni  
 Insulator Material:Polyester(UL94V-0)  
 Resistance To Soldering Heat:  
 245° C±5° C, 10s(PBT insulator)

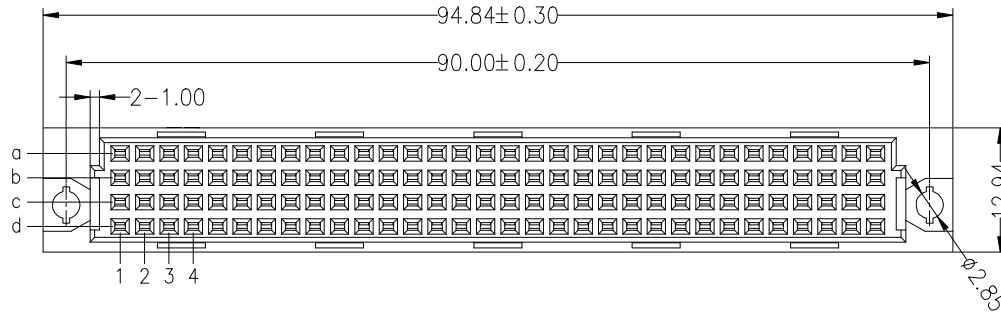

**Ordering Information**

**3511 4 128 A F S XX X N A X**

- No.of Pins  
NPin  
N=128
- Contact Type  
F=Female
- Contact Plating  
G0:Gold Flash  
S0:Gold Flash/Tin  
S1:3U" Gold/Tin  
S2:5U" Gold/Tin  
S3:10U" Gold/Tin  
S4:15U" Gold/Tin  
S5:30U" Gold/Tin
- Contact Material  
B=Brass  
P=Phosphor Bronze
- Stream Code

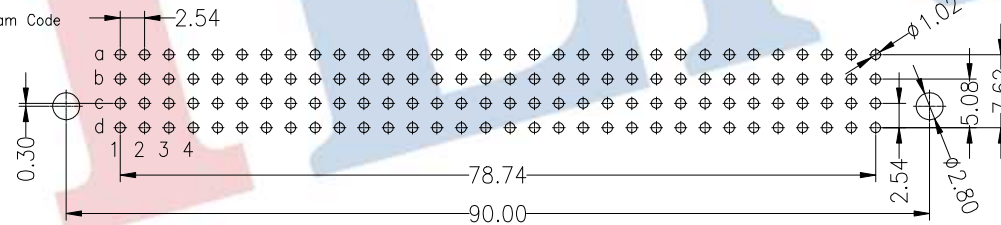

Recommended P.C.B Layout(Top Side)  
 (PCB BOARD TOLERANCE±0.05)

|     |            |                          |  |           |       |         |            |            |       |     |   |  |
|-----|------------|--------------------------|--|-----------|-------|---------|------------|------------|-------|-----|---|--|
|     |            |                          |  | OPERATION |       | DRAW    | Jelly Feng | 2023.03.29 | SCALE | FIT | <b>JILN</b> ® 深圳市锦凌电子有限公司<br>SHENZHEN JINLING ELECTRONICS CO.,LTD<br>Tel: 86-755-27483253 Fax: 86-755-2997-5588 |  |
|     |            |                          |  | X.X       | ±0.30 |         |            |            | UNIT  | mm  |   |  |
|     |            |                          |  | X.XX      | ±0.20 | CHECK   |            |            | SIZE  | A4  | PART NO.  |  |
|     |            |                          |  | X.XXX     | ±0.10 |         |            |            |       |     | 35114128AFSXXXNAX   |  |
| A0  | 2023.03.29 | NEW DRAWING              |  | Angle     | ±3°   | APPROVE |            |            | SHEET | 1/1 | TITLE:  |  |
| REV | DATE       | MODIFICATION DESCRIPTION |  | DIM       | TOL   |         |            |            |       |     | 欧式插座 母座 四排 180度 无鱼叉 成品系列图   |  |