
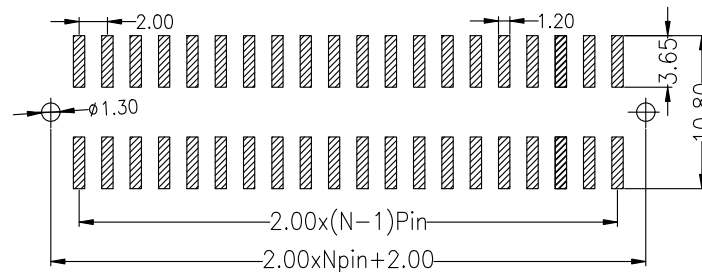


HSF RoHS




SPECIFICATIONS

Rated Current: 3.0AMP
 Contact Resistance: 20mΩ Max
 Withstand Voltage: 1000V AC/DC
 Insulation Resistance: 1000MΩ Min
 Operation Temperature: -40°C to +105°C



Contact Material: Phosphor bronze
 Contact Plating: Au or Sn Over Ni
 Insulator Material: Polyester (UL94V-0)
 Resistance To Soldering Heat:
 260°C ± 5°C, 10s (PA9T insulator)

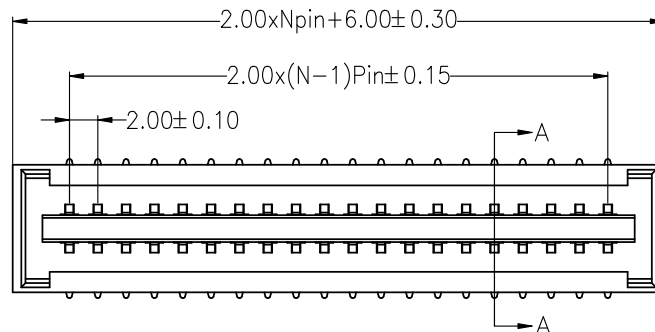

Recommended P.C.B Layout

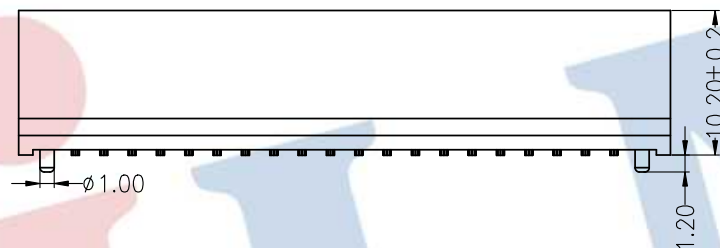

A-A SECTION

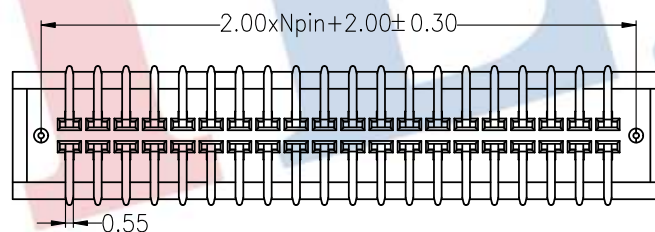

Mating Draw (Ref)

Ordering Information

4410- 2 XX M XX M E B W 0 X

- | | |
|-------------|-----------------|
| No. of Pins | Contact Plating |
| 2x20P | G0: Gold Flash |
| 2x25P | G1: 1U" Gold |
| 2x27P | G2: 2U" Gold |
| 2x32P | G3: 3U" Gold |
| | G4: 5U" Gold |
| | G5: 10U" Gold |

				OPERATION		DRAW	Popzhang	20.09.15	SCALE	FIT
				X.X	± 0.30				UNIT	mm
				X.XX	± 0.20	CHECK			SIZE	A4
A	2020.09.15	NEW DRAWING		X.XXX	± 0.10					
REV	DATE	MODIFICATION DESCRIPTION		CHANGE	ANGLE	APPROVE			SHEET	1/1
					DIM	TOL			PROJ.	⌀

JILN 深圳市锦凌电子有限公司
 SHENZHEN JINLING ELECTRONICS CO.,LTD
 Tel: 86-755-27483253 Fax: 86-755-2997-5588

PART NO. 4410-2XXMXXMEBW0X
 TITLE: 2.0加强型金手指连接器 公座 2xNpin H10.2 SMT 带柱