




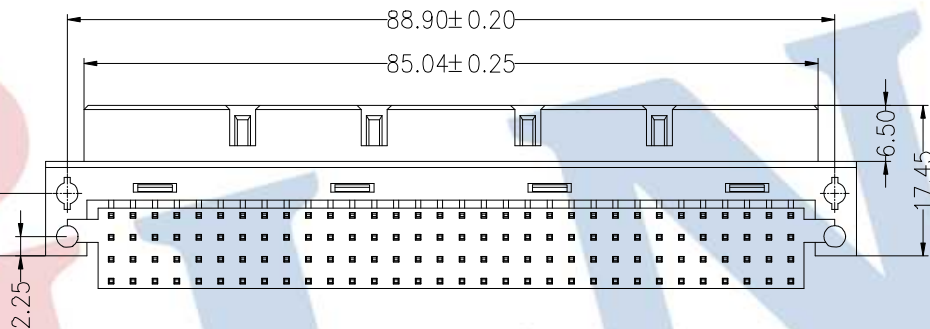

SPECIFICATIONS

Rated Current:3.0AMP
 Contact Resistance:30mΩ Max
 Withstand Voltage:1000V AC/DC
 Insulation Resistance:1000MΩ Min
 Operation Temperature:-40°C to +105°C


Contact Material:Copper Alloy
 Contact Plating:Au or Sn Over Ni
 Insulator Material:Polyester(UL94V-0)
 Resistance To Soldering Heat:
 245°C±5°C For 5~10 Second(PBT insulator)

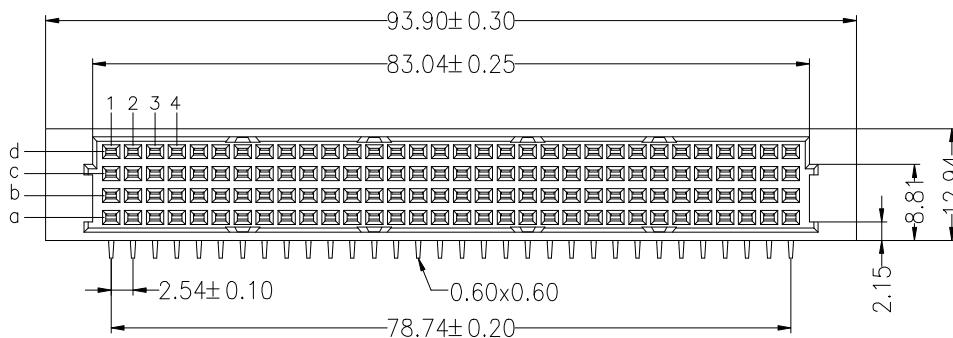

Ordering Information

3511 4 128 A F R XX X N A X

No. of Pins NPin N=128	Contact Type F=Female	Contact Plating G0:Gold Flash S0:Gold Flash/Tin S1:3U" Gold/Tin S2:5U" Gold/Tin S3:10U" Gold/Tin S4:15U" Gold/Tin S5:30U" Gold/Tin	Contact Material B=Brass P=Phosphor Bronze	Stream Code
------------------------------	--------------------------	---	--	-------------

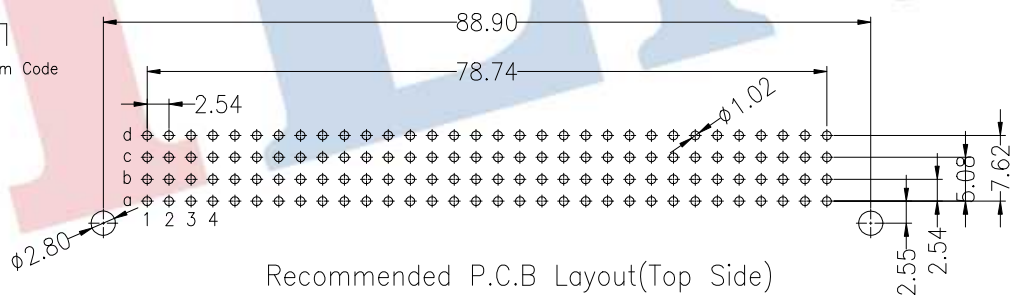

Recommended P.C.B Layout(Top Side)
 (PCB BOARD TOLERANCE±0.05)

A	AO	2023.03.29	NEW DRAWING	CHANGE	OPERATION	DRAW	Jelly Feng	2023.03.29	SCALE	FIT	JILN ® 深圳市锦凌电子有限公司 SHENZHEN JINLING ELECTRONICS CO.,LTD Tel: 86-755-27483253 Fax: 86-755-2997-5588	
	REV	DATE	MODIFICATION DESCRIPTION		X.X ±0.30	CHECK			UNIT	mm		
					X.XX ±0.20	APPROVE			SIZE	A4	PART NO.	35114128AFRXXXNAX
					X.XXX ±0.10				SHEET	1/1	TITLE:	欧式插座 四排母座 90度 无鱼叉 成品系列图
				Angle ±3°				PROJ.	⊕			
				DIM TOL								