







**SPECIFICATIONS**

Rated Current:1.0AMP  
 Contact Resistance:20mΩ Max  
 Withstand Voltage:500V AC/DC  
 Insulation Resistance:1000MΩ Min  
 Operation Temperature:-40°C to +105°C

Contact Material:Brass  
 Contact Plating:Au or Sn Over Ni  
 Insulator Material:Polyester(UL94V-0)  
 Resistance To Soldering Heat:  
 245°C±5°C, 10s(PBT insulator)  
 260°C±5°C, 10s(PA6T&PA9T&LCP insulator)

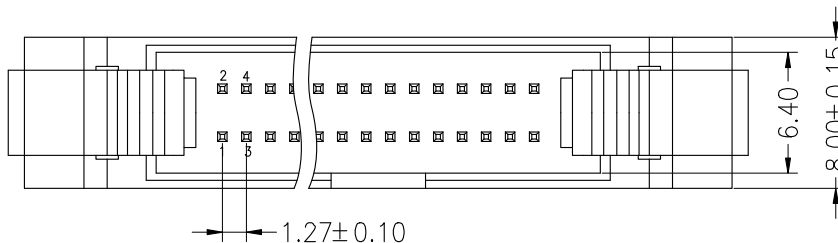

Recommended P.C.B Layout(Top Side)  
 (PCB BOARD TOLERANCE±0.05)

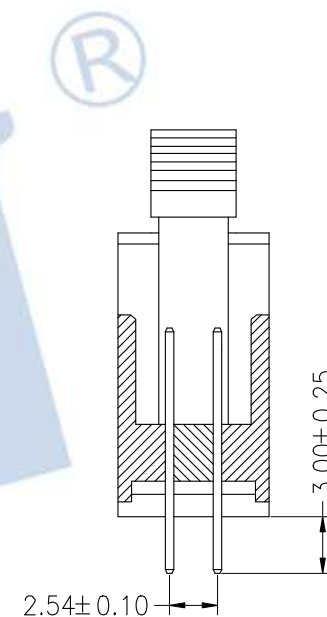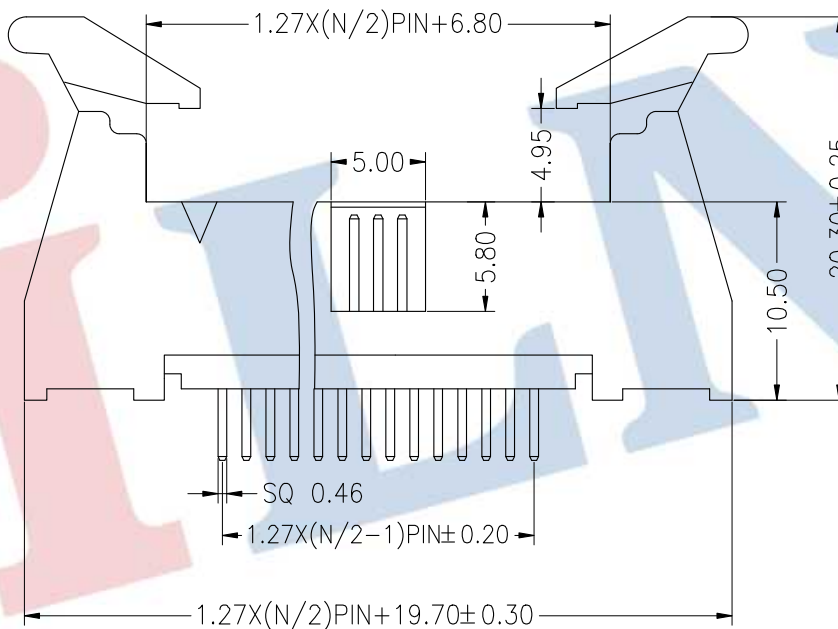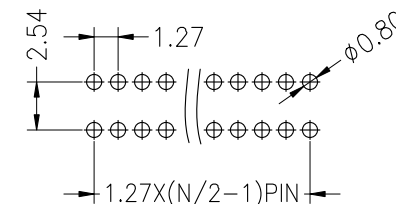

**Ordering Information**

**3340 XX S XX X B L X 0X**

No. of Pins  
10--100

Contact Plating  
 G0:Gold Flash  
 G1:1u" Gold  
 G2:1.5u" Gold  
 G3:2u" Gold  
 G4:3u" Gold  
 G5:5u" Gold  
 G6:10u" Gold  
 G7:15u" Gold  
 G8:30u" Gold  
 S0:Gold Flash/Tin  
 SN:Tin

Insulator Material Option  
 A=BK-PBT  
 C=BK-PA6T  
 E=BK-PA9T  
 F=BK-LCP

Color Type  
 B=Black

Packing  
 A=Tray  
 T=Tube  
 R=Reel

				OPERATION		DRAW	Wei Chen	21.04.14	SCALE	FIT	<b>JILN</b> ® 深圳市锦凌电子有限公司 SHENZHEN JINLING ELECTRONICS CO.,LTD Tel: 86-755-27483253 Fax: 86-755-2997-5588	
				X.X	±0.30				UNIT	mm		
				X.XX	±0.20	CHECK	SIZE	A4				
				X.XXX	±0.10	APPROVE	SHEET	1/1				
A0	2021.04.14	NEW DRAWING		Angle	±3°			PROJ.		PART NO.	3340XXSXXBLX0X	
REV	DATE	MODIFICATION DESCRIPTION		DIM	TOL					TITLE:	1.27*2.54mm ejector header Npin 180°	